


G023 - FREEZING PRO
Cold Protection Latex



"It is possible that gloves marked with previous standards are despatched. Cofra grants that all productions do not have technical and quality differences."

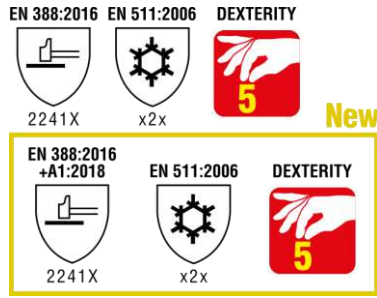

ANTIOXIDANT LATEX
It resists to air and sunlight up to a month longer than common latex gloves
RECOMMENDED IN WORK ENVIRONMENTS WITH TEMPERATURE UP TO -30 °C



Features	<ul style="list-style-type: none"> • Excellent thermal insulation • Good cut resistance • Excellent dexterity • New compound made of antioxidant latex 			
Coating	Crinkled antioxidant latex			
Lining	Brushed acrylic			
Gauge	7			
Colour	Fluorescent orange/black			
Application	Road works, maintenance, building and construction, warehouse, environmental services, agriculture			
Sizes	8 (M)	9 (L)	10 (XL)	11 (XXL)
Lenght	25 cm	26 cm	27 cm	28 cm
	9,9"	10,2"	10,6"	11"
Packaging	Code		Quantity	
	G023-D100		1 dozen (12 single packed gloves)	
	G023-K100		Carton containing 6 dozen (72 single packed gloves)	

SAFETY TECHNICAL SPECIFICATIONS

The PPE is in compliance with essential requirements of (EU) 2016/425 regulation

STANDARD	DESCRIPTION	MINIMUM REQUIREMENT / RANGE	RESULT REACHED
EN 420:2003 + A1 2009	pH determination	3,5 < pH < 9,5	7,0
UNI EN 14362-1/3:2012	Carcinogenic and aromatic amines	≤ 30 ppm	< 5
EN ISO 21420:2020	Protective gloves - General requirements and test methods	COMPLIANT / NOT COMPLIANT	COMPLIANT

STANDARD	DESCRIPTION	LEVEL					LEVEL REACHED
		1	2	3	4	5	
EN 388:2016+A1:2018	Abrasion resistance (number of frictions)	≥ 100	≥ 500	≥ 2000	≥ 8000	-	2
EN 388:2016+A1:2018	Cutting test : blade cut resistance (index)	≥ 1,2	≥ 2,5	≥ 5,0	≥ 10,0	≥ 20,0	2
EN 388:2016+A1:2018	Tear resistance (N)	≥ 10	≥ 25	≥ 50	≥ 75	-	4
EN 388:2016+A1:2018	Puncture resistance (N)	≥ 20	≥ 60	≥ 100	≥ 150	-	1
EN 388:2016+A1:2018 - EN ISO 13997	TDM : cutting resistance (N)	A	B	C	D	E	X
		≥ 2	≥ 5	≥ 10	≥ 15	≥ 22	
EN 388:2016+A1:2018 - EN 13594:2015	Impact protection	P			ABSENT		ABSENT
		Achieved			Test not executed		

If one of the marking indexes is marked with:

- letter "X" means that the test wasn't executed or not applicable;
- number "0" means that the test was executed but the minimum performance level hasn't been achieved

STANDARD	DESCRIPTION	LEVEL				LEVEL REACHED
		1	2	3	4	
EN 511:2006	Convective cold Thermal insulation value I_{TR} (m ² K/W)	0,10 ≤ I_{TR} < 0,15	0,15 ≤ I_{TR} < 0,22	0,22 ≤ I_{TR} < 0,30	0,30 ≤ I_{TR}	X
EN 511:2006 - ISO 5085-1	Cold contact Thermal resistance R (m ² K/W)	0,025 ≤ R < 0,050	0,050 ≤ R < 0,100	0,100 ≤ R < 0,150	0,150 ≤ R	2
EN 511:2006 - ISO 15383	Water resistance *	1 Achieved		0 Not achieved		X

* The performance level 1 indicates that no water transit occurred at the end of the trial period. When this requirement is not fulfilled, it is indicated with performance level 0 and the gloves if they are wet can lose their insulating capacities.

If one of the marking indexes is marked with:

- letter "X" means that the test wasn't executed or not applicable;
- number "0" means that the test was executed but the minimum performance level hasn't been achieved