


**G010 - TOTAL PROOF**  
*Mechanical Protection Nitrile*

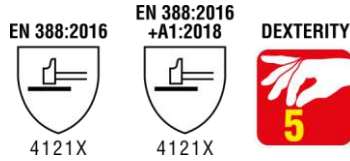

"It is possible that gloves marked with previous standards are despatched. Cofra grants that all productions do not have technical and quality differences."

- Features**
- Oil Protection Technology - Double layer coating resistant to oils and greases
  - Double-layered nitrile palm: robust and water resistant
  - Superb grip on oily surfaces, thanks to their special sand finished nitrile coating
  - High abrasion resistance
  - Excellent protection against oils and grease, thanks to the total nitrile covering

**Coating** Sand finished nitrile, doublelayer, fully coated

**Lining** Nylon

**Gauge** 13

**Colour** Blue/black

**Application** Handling of metal parts even oily or dirty, mechanical and car industry, building and construction, maintenance, contact with oils and fats

Sizes	7 (S)	8 (M)	9 (L)	10 (XL)	11 (XXL)
-------	-------	-------	-------	---------	----------

Lenght	23,5 cm	24,5 cm	25,5 cm	26,5 cm	27,5 cm
	9,2"	9,6"	10"	10,4"	10,8"

Packaging	Code		Quantity	
	G010-D100		1 dozen (12 single packed gloves)	
	G010-K100		Carton containing 10 dozen (120 single packed gloves)	




**SUPERB GRIP ON OILY SURFACES - TOTAL COVERING**



## Oil Protection Technology

Double layer coating resistant to oils and greases. The internal layer resists to oil penetration and enhances durability. The sandblasted external layer resists to oils, providing a safe hold. The *Oil Protection Technology* line offers a range of various models, different from each other in terms of use and type of coating.

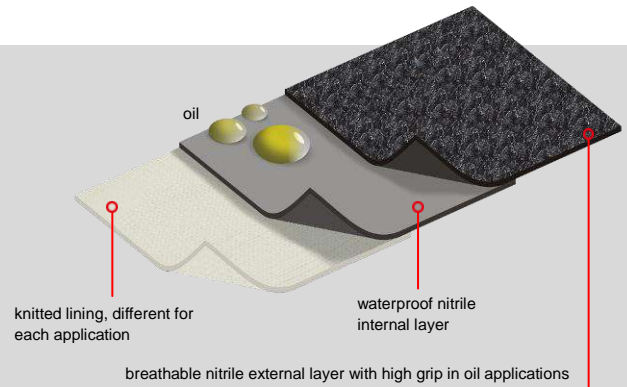

Mechanical Protection			Cut Protection	Cold Protection
Palm coating	¾ coating	Total coating	Total coating	¾ coating
 <p><b>OILPROOF</b></p> <p>Breathability ●●●●</p> <p>Impermeability ●●●●</p> <p>Abrasion resistance ●●●●</p>	 <p><b>SKINPROOF</b></p> <p>Breathability ●●●○</p> <p>Impermeability ●●●●</p> <p>Abrasion resistance ●●●●</p>	 <p><b>TOTAL PROOF</b></p> <p>Breathability ●●●○</p> <p>Impermeability ●●●●</p> <p>Abrasion resistance ●●●●</p>	 <p><b>BLACK DEEP</b></p> <p>Breathability ●●●○</p> <p>Impermeability ●●●●</p> <p>Abrasion resistance ●●●●</p>	 <p><b>BUCKLER</b></p> <p>Breathability ●●●○</p> <p>Impermeability ●●●●</p> <p>Abrasion resistance ●●●●</p>

**SAFETY TECHNICAL SPECIFICATIONS**

The PPE is in compliance with essential requirements of (EU) 2016/425 regulation

STANDARD	DESCRIPTION	MINIMUM REQUIREMENT / RANGE	RESULT REACHED
EN 420:2003 + A1 2009	pH determination	3,5 < pH < 9,5	<b>7,15</b>
UNI EN 14362-1/3:2012	Carcinogenic and aromatic amines	≤ 30 ppm	<b>NOT RECORDING</b>
EN ISO 21420:2020	Further technical specifications applied	COMPLIANT / NOT COMPLIANT	<b>COMPLIANT</b>

STANDARD	DESCRIPTION	LEVEL					LEVEL REACHED
		1	2	3	4	5	
EN 388:2016+A1:2018	Abrasion resistance (number of frictions)	≥ 100	≥ 500	≥ 2000	≥ 8000	-	<b>4</b>
EN 388:2016+A1:2018	Cutting test : blade cut resistance (index)	≥ 1,2	≥ 2,5	≥ 5,0	≥ 10,0	≥ 20,0	<b>1</b>
EN 388:2016+A1:2018	Tear resistance (N)	≥ 10	≥ 25	≥ 50	≥ 75	-	<b>2</b>
EN 388:2016+A1:2018	Puncture resistance (N)	≥ 20	≥ 60	≥ 100	≥ 150	-	<b>1</b>
EN 388:2016+A1:2018 - EN ISO 13997	TDM : cutting resistance (N)	<b>A</b>	<b>B</b>	<b>C</b>	<b>D</b>	<b>E</b>	<b>F</b>
		≥ 2	≥ 5	≥ 10	≥ 15	≥ 22	≥ 30
EN 388:2016+A1:2018 - EN 13594:2015	Impact protection	<b>P</b>			<b>ABSENT</b>		<b>ABSENT</b>
		Achieved			Test not executed		

If one of the marking indexes is marked with:

- letter "X" means that the test wasn't executed or not applicable;
- number "0" means that the test was executed but the minimum performance level hasn't been achieved.